


Main Features:

- 1) ANSI or ISO layout
- 2) SA R3 profile PBT keycap
- 3) Dye sublimated legends
- 4) Arbitrary programming
- 5) 3 Layers customization
- 6) Anodized CNC Machined case
- 7) Detachable cable
- 8) Easy switch numeric keypad and Cursor-control keys
- 9) Extra Modifiers keys


Package Content:

1. Keyboard
2. Micro USB Cable
3. Extra modifiers keycap

Keyboard Layout:

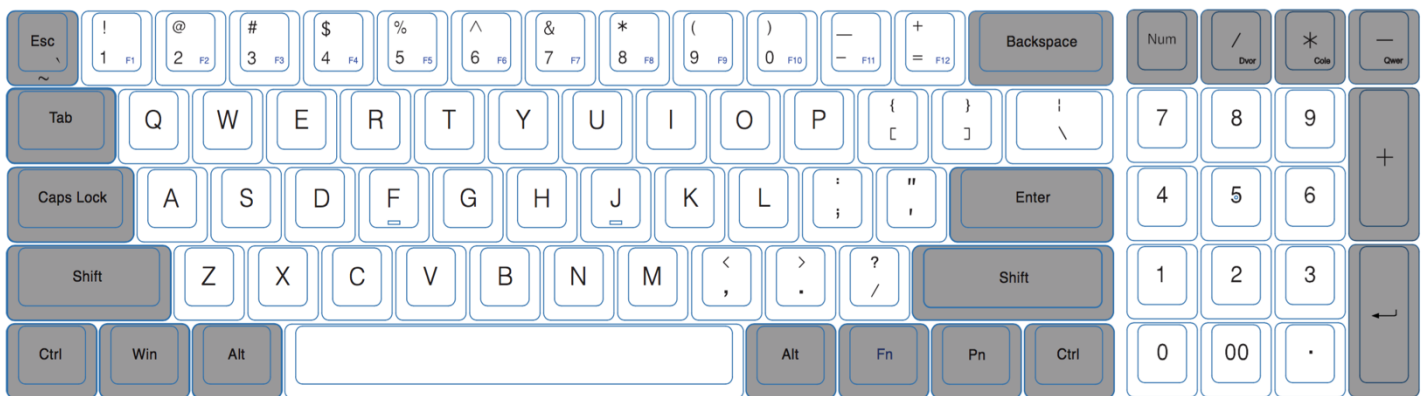

Tenkeyless mode (Number lock off)

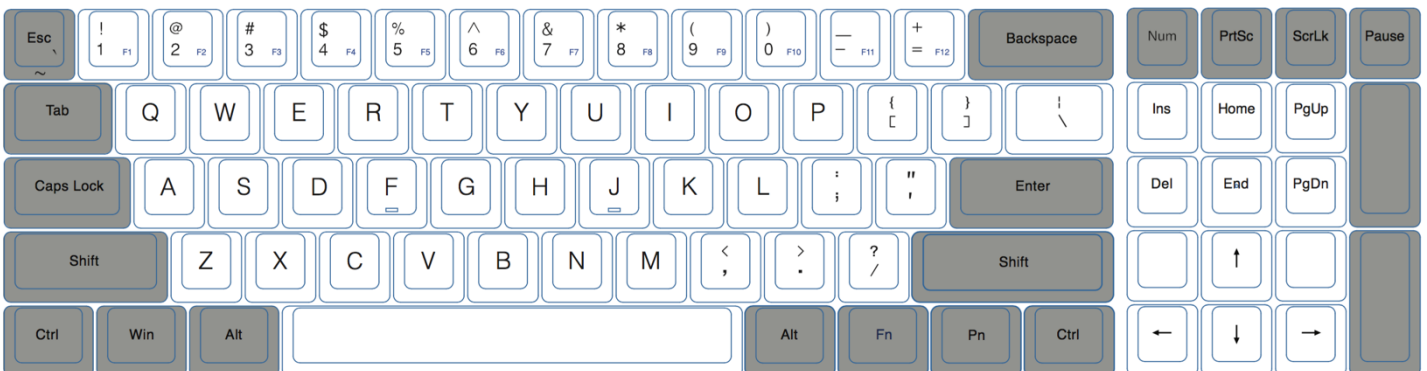

Fn	+	ESC	=	`	Key code change
		1		F1	
		2		F2	
		3		F3	
		4		F4	
		5		F5	
		6		F6	
		7		F7	
		8		F8	
		9		F9	
		0		F10	
		- _		F11	
		= +		F12	
				↑	
		J		←	
		K		↓	
		L		→	
		P		Print Screen	
		[{		Scroll Lock	
] }		Pause Break	
		Z		APP	
		H		Home	
		N		End	
		U		Page Up	
		O		Page Down	
		Backspace		Delete	
::	Insert				
*	COLEMAK				
/	DVORAK				

1. Spacebar LEDs instructions:

- a. Left side of LED - Switching Layers
 - Fn + M = None - Default layer
 - Fn + \leftarrow = Red color - Layer 1
 - Fn + \rightarrow = Green color - Layer 2
 - Fn + \uparrow = Blue color - Layer 3
- b. Right side of LED - Switching Layout
 - Fn + * = Red - COLEMAK
 - Fn + / = Green - DVORAK
 - Fn + - = None - QWERTY (Default)

2. Caps Lock LEDs instructions:

- a. Red = Caps Lock **on**
- b. Green = Number Lock **on**
- c. Yellow = Caps Lock and Number Lock **on**

3. Other instructions:

- a. Programming steps please refer to POK3R
- b. Reset the current layer key-codes: Fn + R
- c. Reset all layers' key-codes and restore to default: L_Alt + R_Alt
- d. Fn + Shift + Esc = ~